


# Fibaro relay switch FGS211

Include or exclude Fibaro relay switch FGS211

1. Add Fibaro Switch to the network by pushing three times push button key no. or service button B located inside the housing of the device. For bi-stable switch perform 3 position changes.

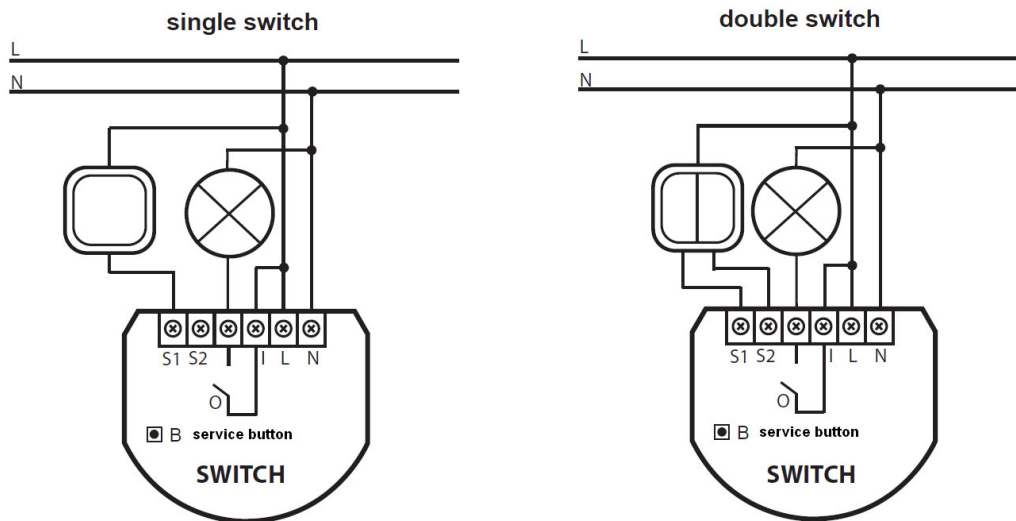

## Reset

Reset by holding B button for 3 sec. or within 5 sec by single pressing the first key S1, and then by holding the second key S2. after connecting mains voltage.